



Assembly instructions for Valley Home Pool Tables

CAUTION

We strongly recommend this assembly/installation is performed by professionals.

This table is *very* heavy – No less than 2 People are required to install this table.

NEVER ALLOW THE BOX TO STAND ON ITS OWN ASSEMBLE NEAR THE TABLE'S FINAL LOCATION



1. Stand box on one of the long sides and remove the banding.

(Box shown without support or A-frame for illustration only)

NEVER ALLOW THE BOX TO STAND ON ITS OWN



2. Very carefully lean the table box back slightly and pull the top of the box off.



3. Remove Box Top, End Protectors, and Slate Protective Pad.



4. Place a protective piece of carpet or cardboard in front of the table on the floor.



5. With one person supporting the table, another should grasp the table by the Bottom Corner Pockets and pull it straight out.




6. Lean table slightly forward and remove the Box Bottom, making certain the bottom Packing Wedge remains in place.



REMOVE PHILLIPS
SCREW TO REMOVE KEY

7. Remove the key from the Access door, open the door and remove the Hardware Pack and (4) Legs inside.

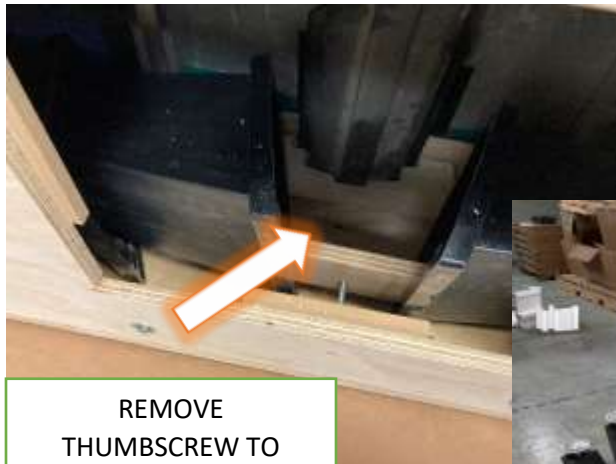

REMOVE
THUMBSCREW TO
REMOVE LEGS





8. Attach each leg to the bottom of the table using 4 bolts.

Attach the bottom two legs first.



9. Screw the Leg Levelers all the way in and replace the Bottom Access Door.



10. Have at least 2 People carefully tilt the table down onto its legs.



11. To level the table place the level in various locations on the slate and rotate the Leg Levelers as needed using a large adjustable wrench or tongue and groove pliers such as Channellock®. *Helpful tip, it is MUCH easier to raise and lower the leveler when another person is lifting up that corner of the table during adjustment*



Larger levels will produce better results. Level your table using the longest level you can find.

